



ISOMETRIC VIEW

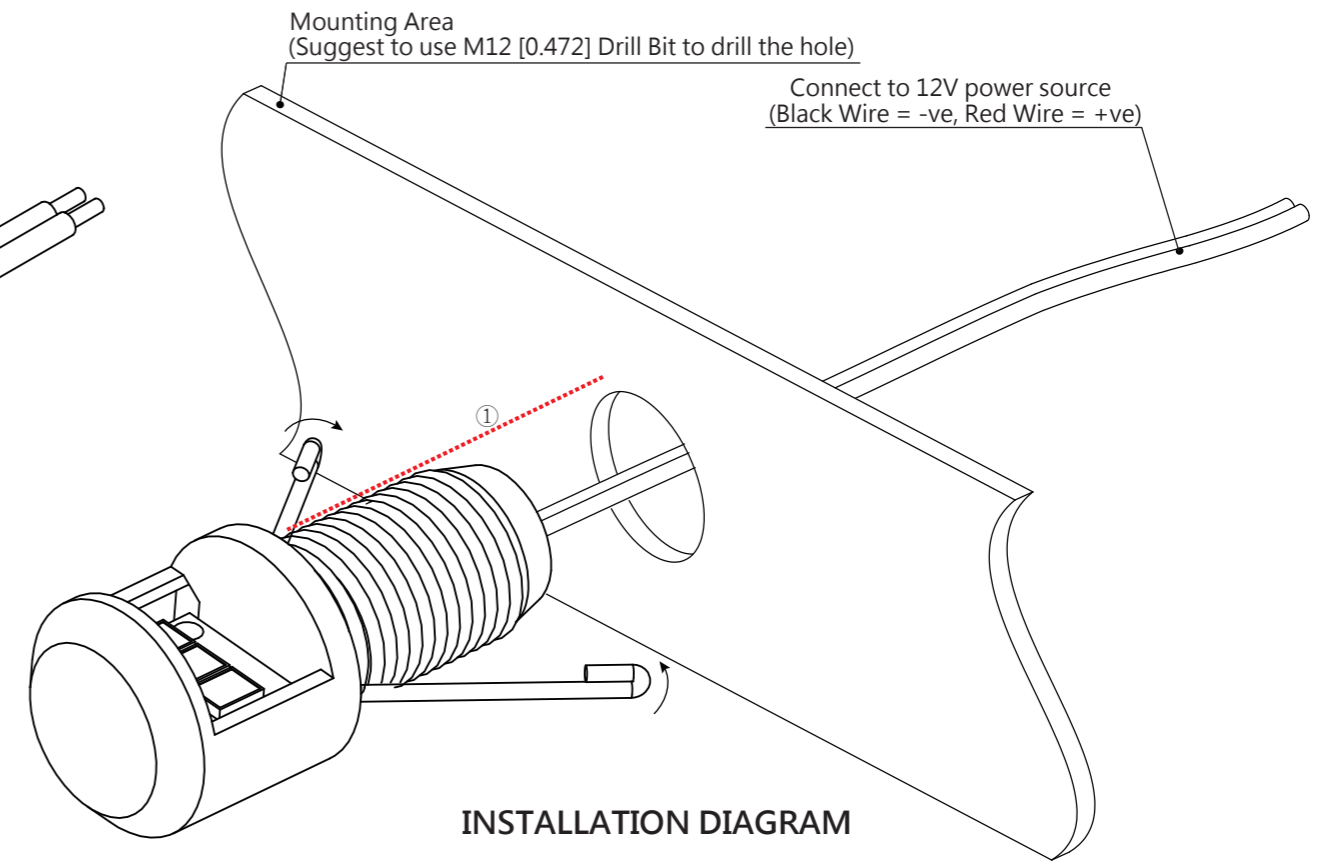


INSTALLATION DIAGRAM


Technical Information (Per module):			
Operating Voltage: DC 12V		PRODUCT NAME: Premium Side View LED Bolt	
Maximum Power Consumption: 50 mA (0.6W)		VERSION: 11mm/ Top Epoxy/ Aluminum Housing/ Snap-Fit/ 1W	
Heat Dissipation: Below 45°C/ 113°F		SCALE: 2 : 1	
Net Weight: 19g		DATE: 21-11-2017	REVISION: B
		PAGE: 1 of 2	



SIDE VIEW

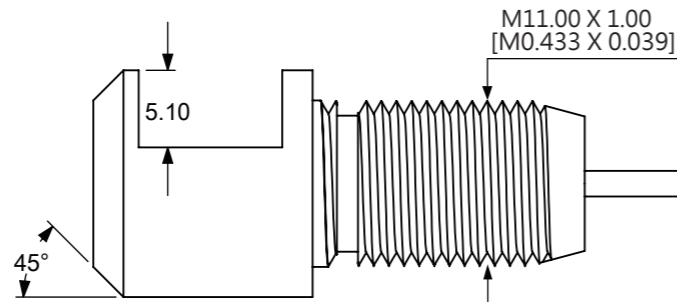

FRONT VIEW

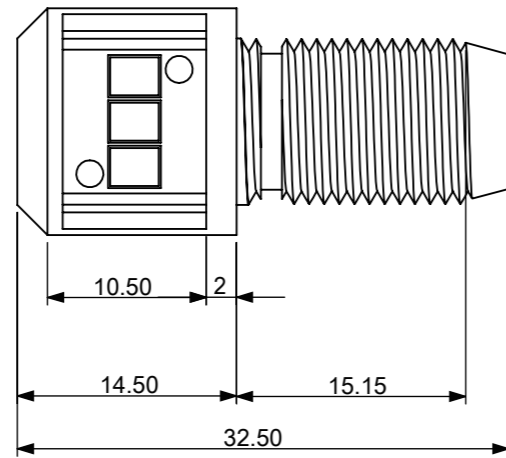


TOP VIEW


1040 ± 15.00

Mounting Area
(Suggest to use M11 [0.433] Drill Bit to drill the hole)

Connect to 12V power source
(Black Wire = -ve, Red Wire = +ve)

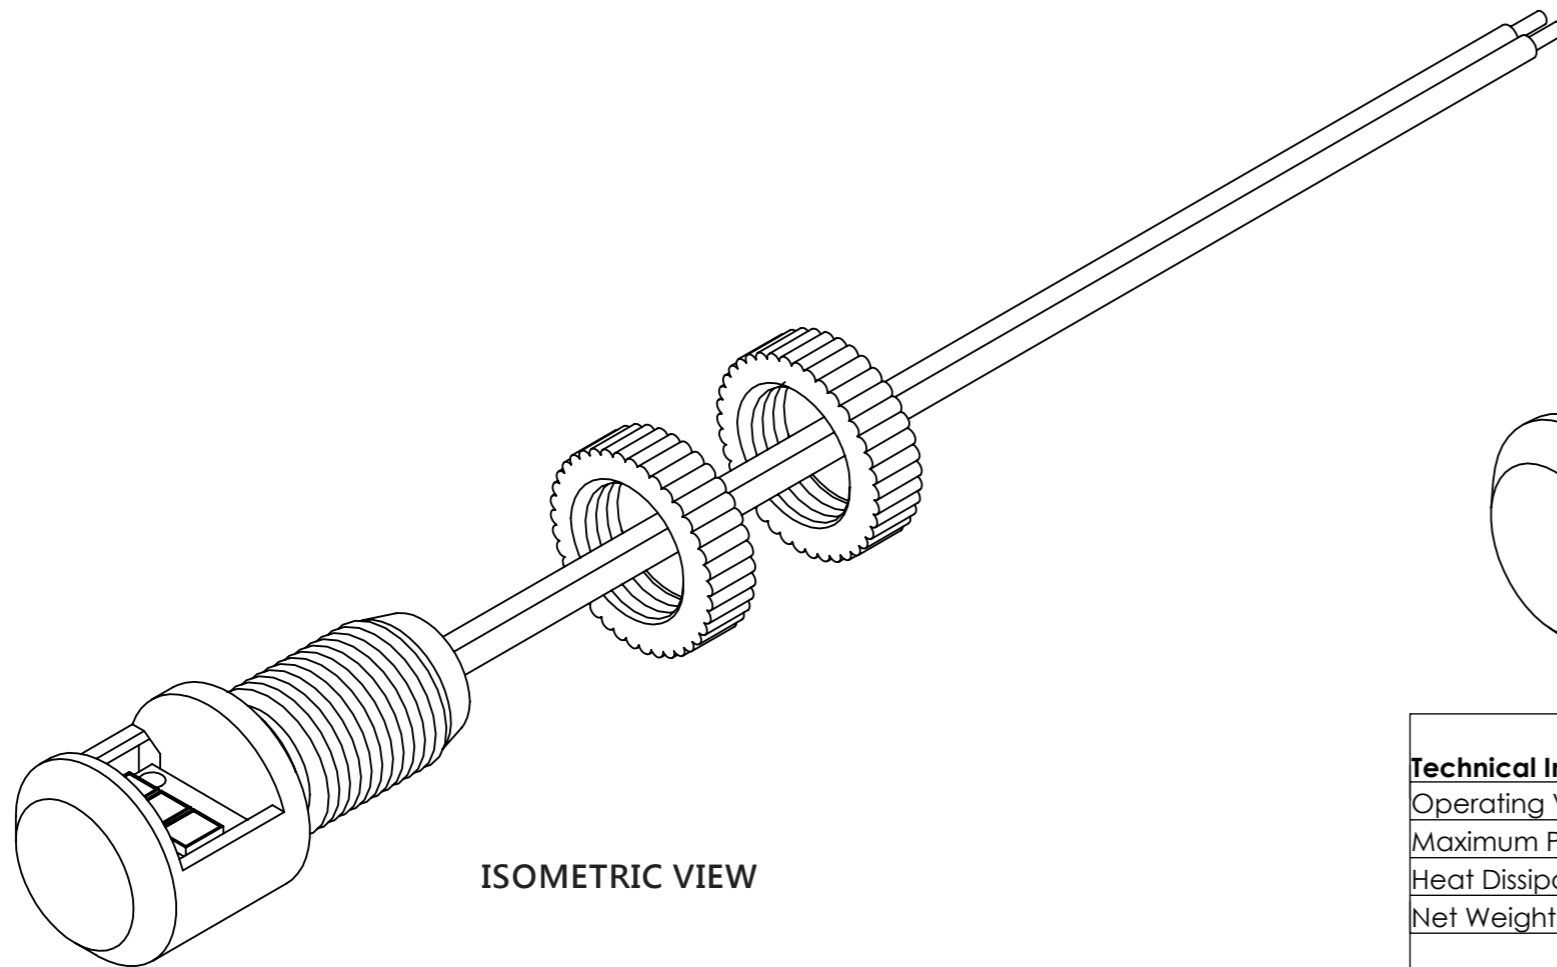

ISOMETRIC VIEW

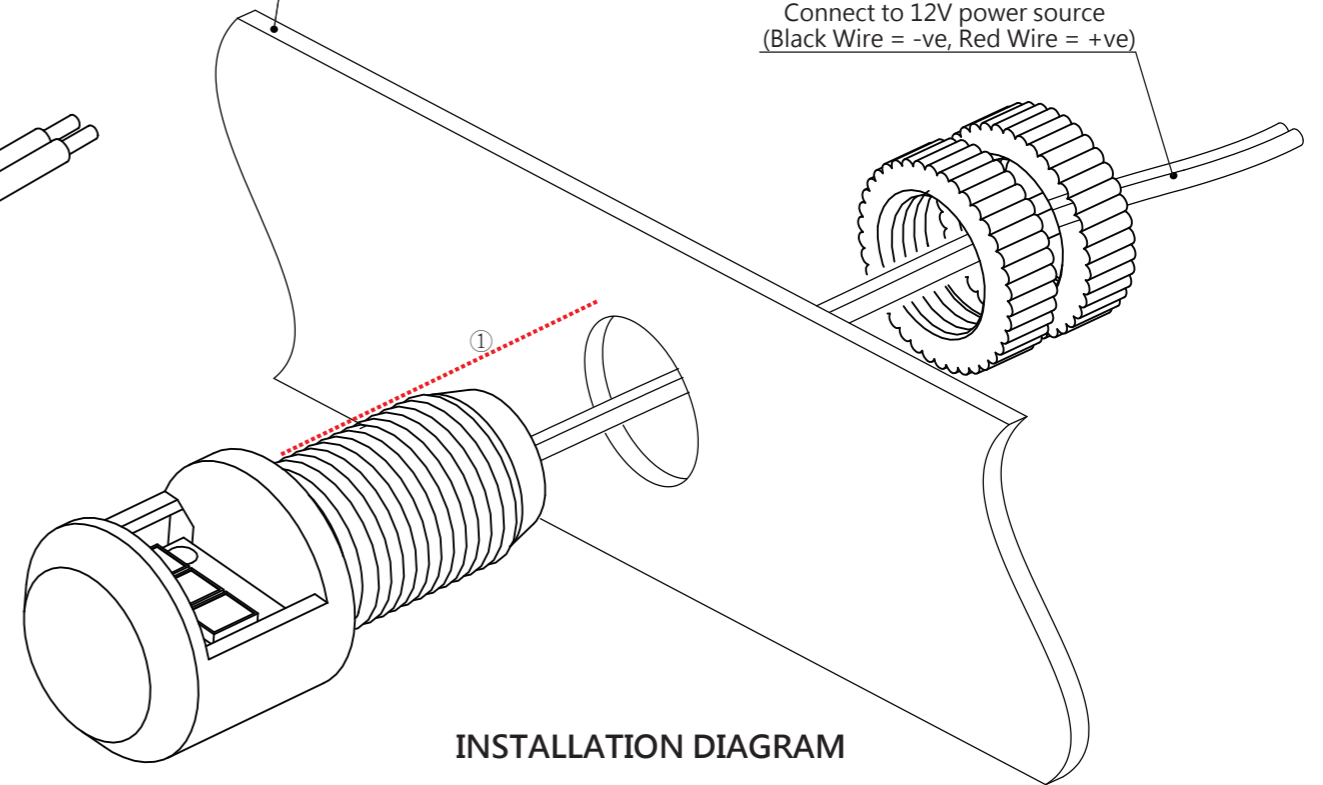

INSTALLATION DIAGRAM

Technical Information (Per module):

Operating Voltage: DC 12V
 Maximum Power Consumption: 50 mA (0.6W)
 Heat Dissipation: Below 45°C/ 113°F
 Net Weight: 19g



PRODUCT NAME: Premium Side View LED Bolt		
VERSION: 11mm/ Top Epoxy/ Aluminum Housing/ Screw Nut/ 1W		
SCALE: 2 : 1		
DATE: 21-11-2017	REVISION: B	PAGE: 2 of 2